ULT-2

Medical Cart COMPANY

Ultrasound cart with height adjustable column, small worktop, lockable wheels.

Easy to clean
Clean surfaces with minimal dirt traps

Durable
7 years warranty

Quick setup
Supplied partially assembled with minimal packaging

Multi purpose
Severeal functions

Lockable wheels
Stability during work

Recyclable materials
Refurbishing possibility



Basic Cart

ULT2-0

Click for Mechanical data on page 9.

ULT2-0-WS-US44

Click for Mechanical data on page 11.



DESIGN PURPOSE

Specially designed for ultrasound imaging.
The cart can be ordered with sevral mounting options.
The worktop has a handle to move the cart, cutouts to store ultrasound gel and devices in soft holders placed in them.

MADE IN HUNGARY


Medical Cart Company Kft. - 2051 Hungary Biatorbágy, Budai út 16.
Phone: +36 23 920 790 - Email: info@medicalcartcompany.hu - www.medicalcartcompany.hu

Revision 01
Date: 2026.10.30.

FUNCTIONS

EASY TO CLEAN SURFACES

We mainly use aluminium materials and powder coat them.
This is how we get an easy to clean product.
We design every single part so that the cleaning staff would access it.

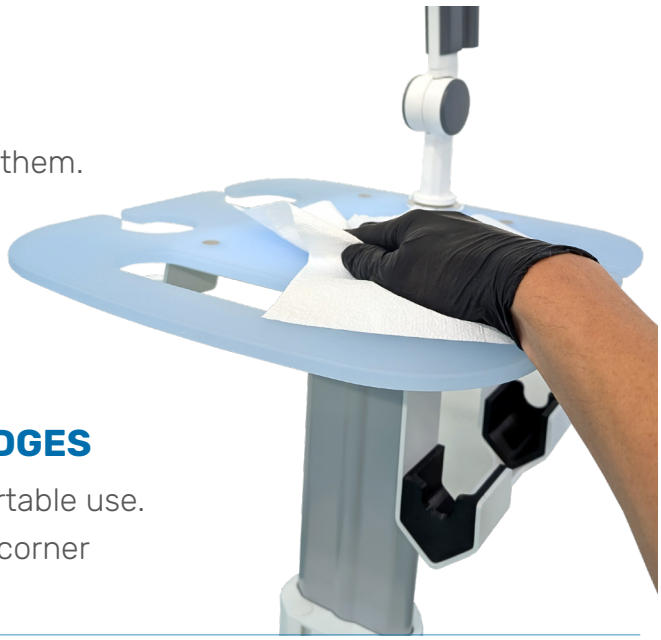

REFURBISHING

Our products can be refurbished and upgraded as and when required.

NO SHARP EDGES

Safe and comfortable use.
We round every corner and edges.

CABLE MANAGEMENT

We placed cable management holes on the work surface. Our arm solutions also have clip-in cable covers. The hollow columns also have enough space to hide cords.



HOLDER OPTIONS

1x or 3x elastic inserts for scanners,
1x cut on work surface for gel bottle

LOCKABLE WHEELS


4x wheels with lock make the cart stand firmly. ESD option available.




FUNCTIONS

HEIGHT ADJUSTMENT


We use gas spring for the height adjustment of our stands. To adjust the height one must hold the work surface with the right hand and pull the lever rod with the left one. Set the desired work height and release the lever.

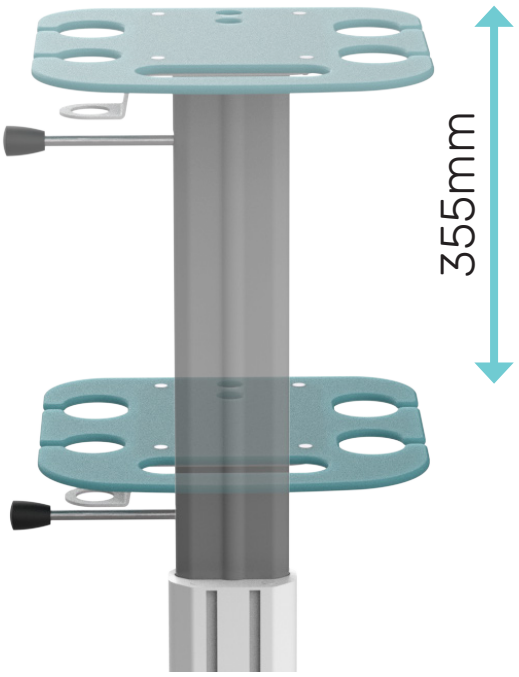

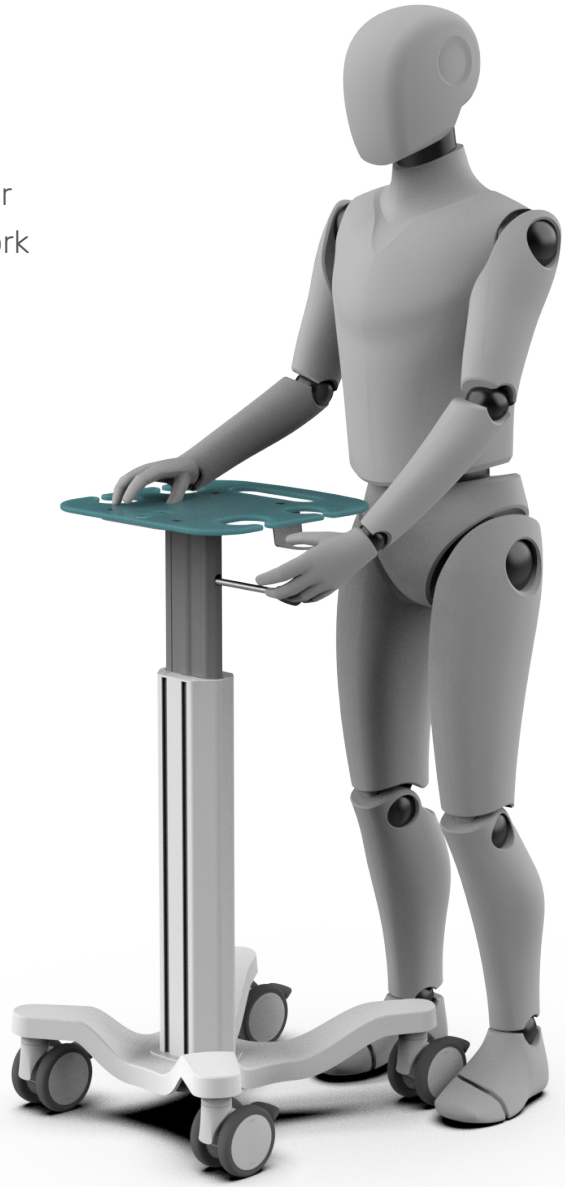

MOUNTING ACCESSORIES

The outer column of the carts has channels to mount accessories throught sliding nuts.

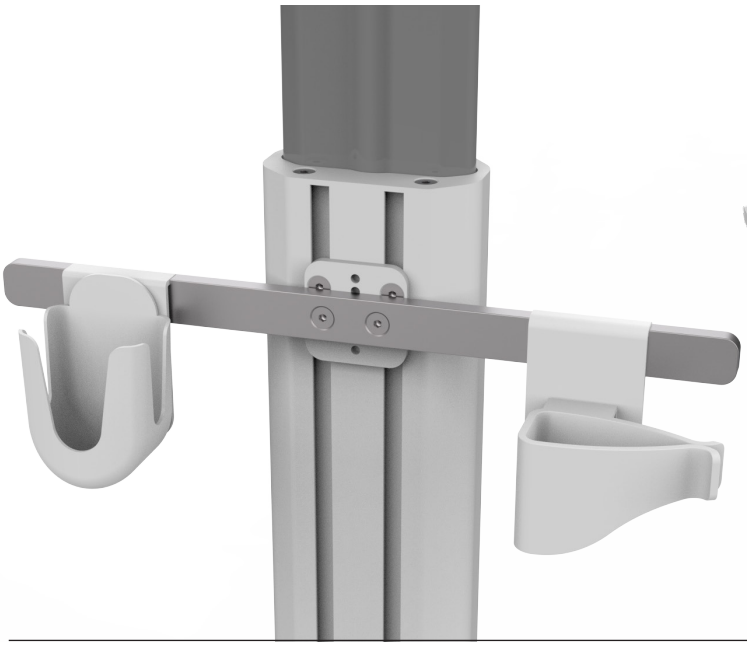



CONFIGURATIONS

Basic Cart
ULT2-0



Click for Mechanical data on page 9.

Basic Cart
with extended Worktop, **2x** holder cuts

ULT2-0-WS-US42



Click for Mechanical data on page 10.

Basic Cart
with extended Worktop, **4x** holder cuts

ULT2-0-WS-US44



Click for Mechanical data on page 11.

Display Mount Cart
ULT2-1



Click for Mechanical data on page 12.

Display Mount Cart
with extended Worktop, **2x** holder cuts

ULT2-1-WS-US42



Click for Mechanical data on page 13.

Display Mount Cart
with extended Worktop, **4x** holder cuts

ULT2-1-WS-US44



Click for Mechanical data on page 14.

Tablet Mount Cart
ULT2-2



Click for Mechanical data on page 15.

Tablet Mount Cart
with extended Worktop, **2x** holder cuts

ULT2-2-WS-US42



Click for Mechanical data on page 16.

Tablet Mount Cart
with extended Worktop, **4x** holder cuts

ULT2-2-WS-US44



Click for Mechanical data on page 17.

CONFIGURATIONS

Laptop Cart
with extended Worktop, **2x** holder cuts

ULT2-3



Click for Mechanical data on page 18.


Laptop Cart
with extended Worktop, **4x** holder cuts

ULT2-3-WS-US44



Click for Mechanical data on page 19.

Tablet Arm Cart
ULT2-7

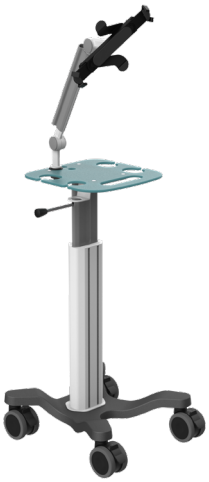

Click for Mechanical data on page 20.

Tablet Arm Cart
with extended Worktop, **2x** holder cuts

ULT2-7-WS-US42



Click for Mechanical data on page 21.

Tablet Arm Cart
with extended Worktop, **4x** holder cuts

ULT2-7-WS-US44



Click for Mechanical data on page 22.

VESA Arm Cart
ULT2-8



Click for Mechanical data on page 23.

VESA Arm Cart
with extended Worktop, **2x** holder cuts

ULT2-2-WS-US42



Click for Mechanical data on page 24.

VESA Arm Cart
with extended Worktop, **4x** holder cuts

ULT2-2-WS-US44



Click for Mechanical data on page 25.


WORK SURFACE OPTIONS

WS-US3-SNA

Small worktop with Display and Arm mount option

Acryl
350x350x8mm






8mm thick acryl work surface
Scanner holder compatibility: SR1-8, SR2-8, SR3-8, SR5-8 (See page 8.)
(Optional 6mm thick Aluminium work surface.)

WS-US42

Large worktop with Arm, Laptop and Display mount option, 2x holder cuts

Aluminium
560x485x6mm



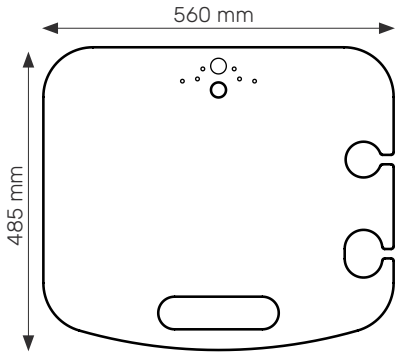


WS-US44

Large worktop with Arm, Laptop and Display mount option, 4x holder cuts

Aluminium
560x485x6mm



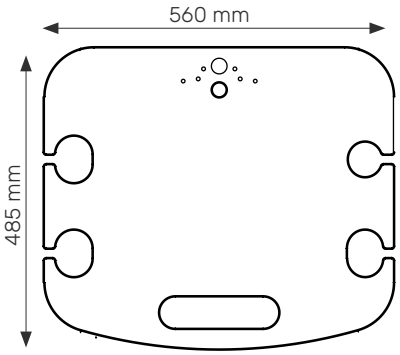

6mm thick aluminium work surface
Scanner holder compatibility: SR1-6, SR2-6, SR3-6, SR5-6 (See page 8.)

CUSTOM BRANDING

All the carts can be painted and branded according to our customers' need. We offer the choice of custom colors for the aluminium components from **Tiger 3D metallic range**.

Visit the Tiger webshop and select the color you desire:
https://www.tiger-coatings.com





Exmples of branded Ultrasound carts

ACCESSORIES

Display Mount




Display Mount
DM5

Tablet Mount



Tablet Mount
TM2, TM2-XL

Display Mount




Display Arm
SNA1-WS2-L2B-VES1

Tablet Mount



Tablet Arm
SNA1-WS2-L2B-TM2

Shelf options



Shelf 1
S1-C5



Shelf 2
S2-C5




Shelf 3
S3-C5



Shelf 11
S11-C5

Power supply holder options




PSU Holder 1
PSH1-C5



PSU Holder 2
PSH2-C5



PSU Holder 4
PSH4-C5



PSU Holder 5
PSH5-C5



PSU Holder 7
PSH7-C5



PSU Holder 9
PSH9-C5


Holder options



Mouse Holder
MH1



Scanner Holder 1
SH1



Scanner Holder 2
SH2




Transvaginal scanner holder
SH7



Cable Hook 1
CH1-C5



Gel Holder 1
GH1



Gel Holder 2
GH2



Gel Holder 3
GH3-C5



Cable Hook 6
CH6



Cable Hook 7
CH7



Gel Holder to WS
1-1838 (for WS-US42/44)

ACCESSORIES

Storage options



Small Basket
ST1-C5



Large Basket
ST2-C5



Plastic storage
ST3-C5



Plastic storage
ST8-C5



Plastic storage
1-1725

CPU Mount options



CPU Mount S
CPU1-C5



CPU Mount M
CPU2-C5

Rubber scanner inserts



Rubber Scanner Holder 1 for 6mm thick worktop
SR1-6



Rubber Scanner Holder 1 for 8mm thick worktop
SR1-8



Rubber Scanner Holder 2 for 6mm thick worktop
SR2-6



Rubber Scanner Holder 2 for 8mm thick worktop
SR2-8



Rubber Scanner Holder 3 for 6mm thick worktop
SR3-6



Rubber Scanner Holder 3 for 8mm thick worktop
SR3-8



Rubber Scanner Holder 5 for 6mm thick worktop
SR5-6



Rubber Scanner Holder 5 for 8mm thick worktop
SR5-8

Laptop protector



Laptop protector
LM2

DIN Rail options




DIN Rail
DR3-C5

ULT2-0
Technical drawing

All dimensions are in millimeter

BACK TO CONFIGURATIONS

Rubber inserts
Datasheet

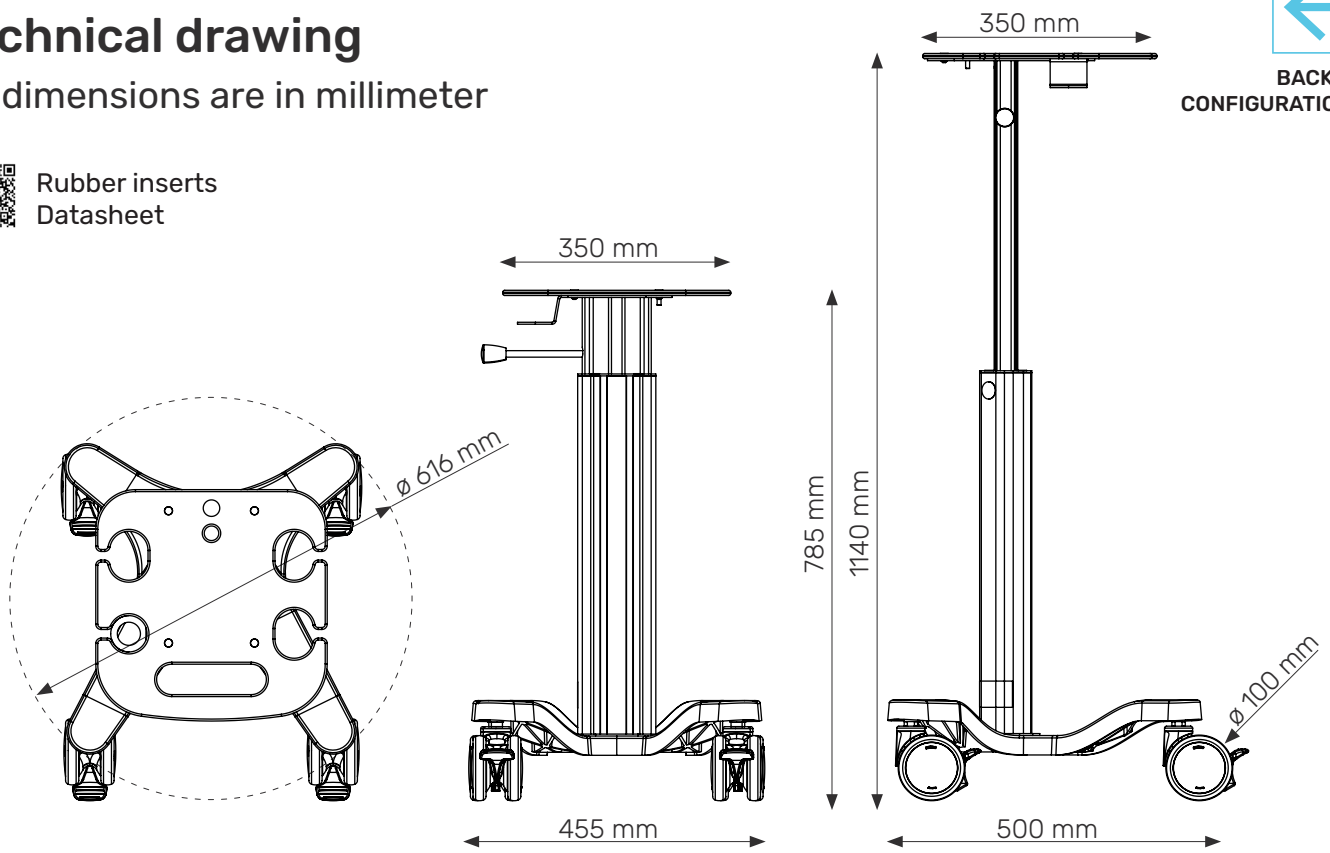

Cart Properties


Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	16 kg
Worktop dimensions	w: 350 mm, d: 350 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-0-WS-US42
Technical drawing

All dimensions are in millimeter

Rubber inserts
Datasheet

BACK TO CONFIGS

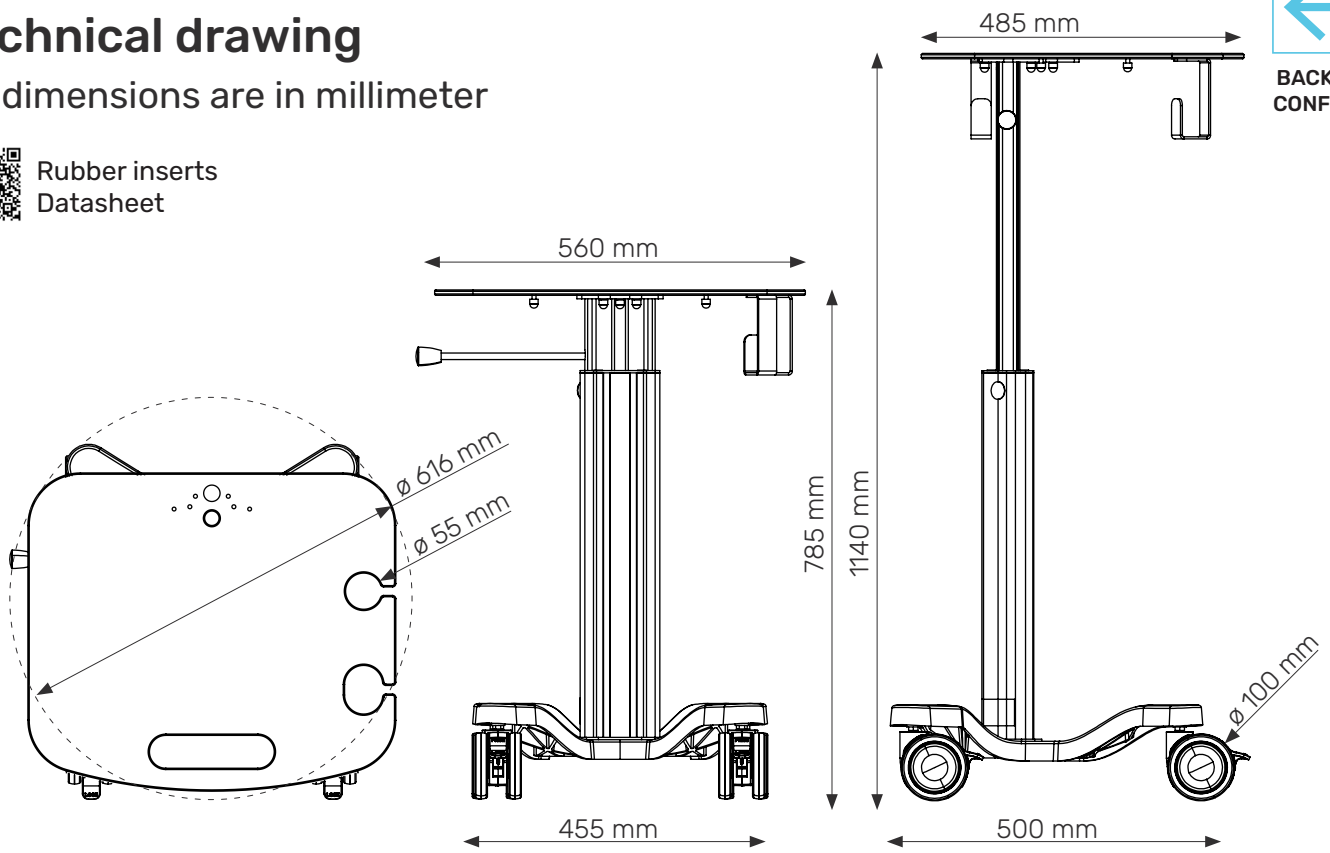

Cart Properties


Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	16 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-0-WS-US44
Technical drawing

All dimensions are in millimeter

Rubber inserts
Datasheet

BACK TO CONFIGS

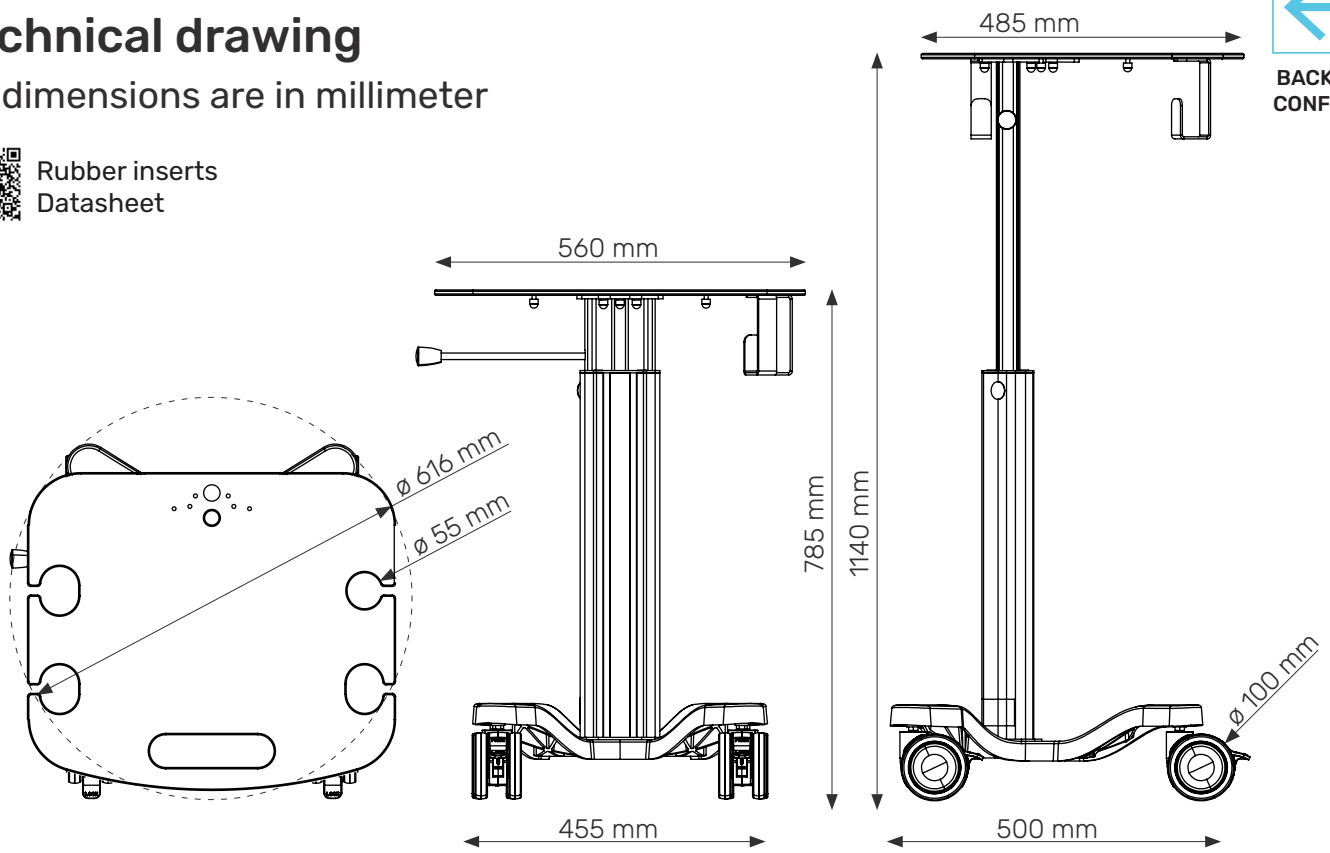

Cart Properties


Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	16 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-1
Technical drawing

All dimensions are in millimeter

BACK TO CONFIGURATIONS

VESA Mount Datasheet

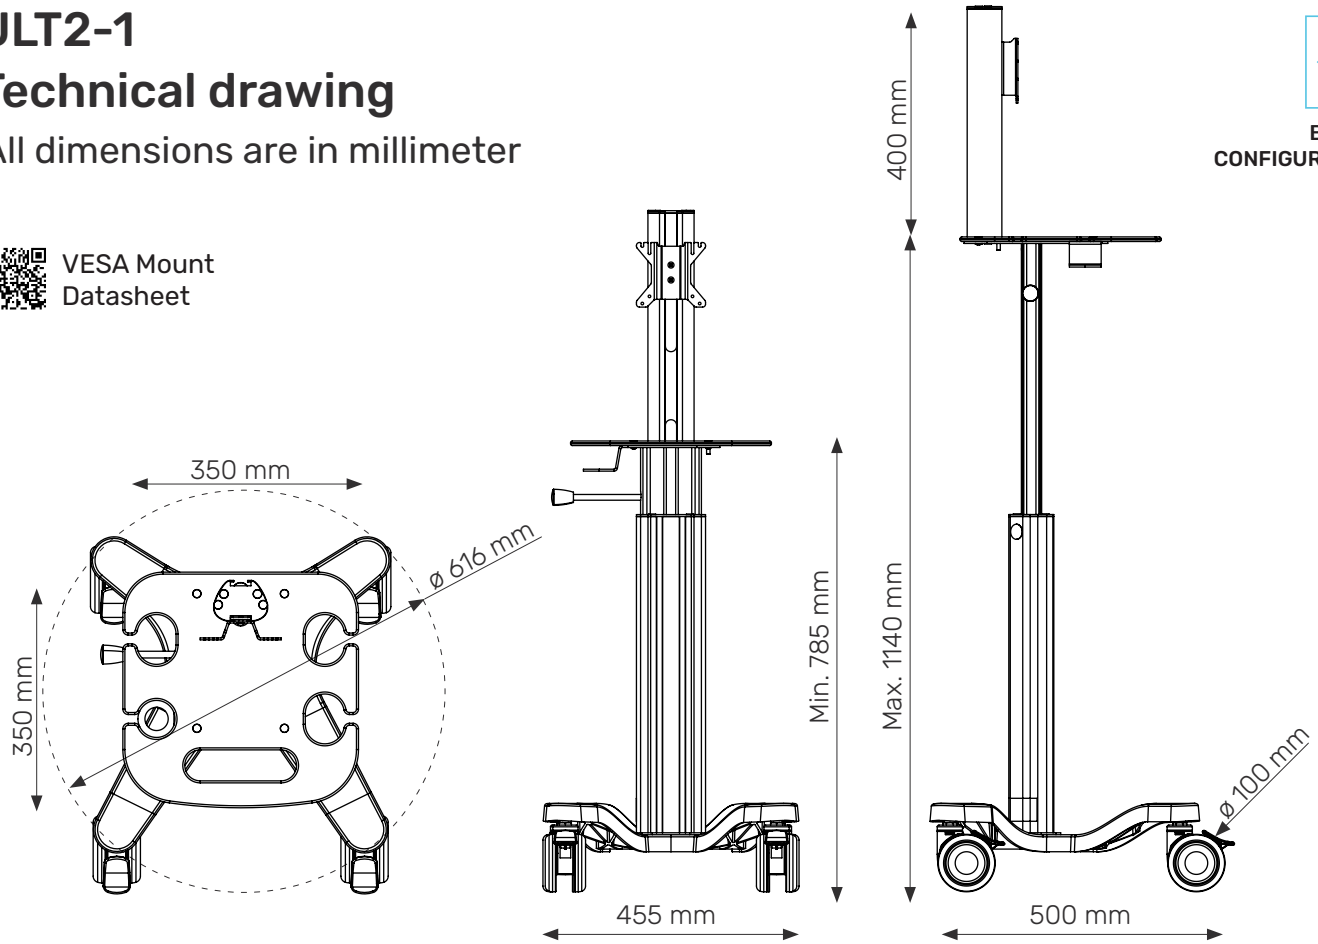

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 350 mm, d: 350 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-1-WS-US42
Technical drawing

All dimensions are in millimeter

VESA Mount Datasheet

Rubber inserts Datasheet

BACK TO CONFIGURATIONS

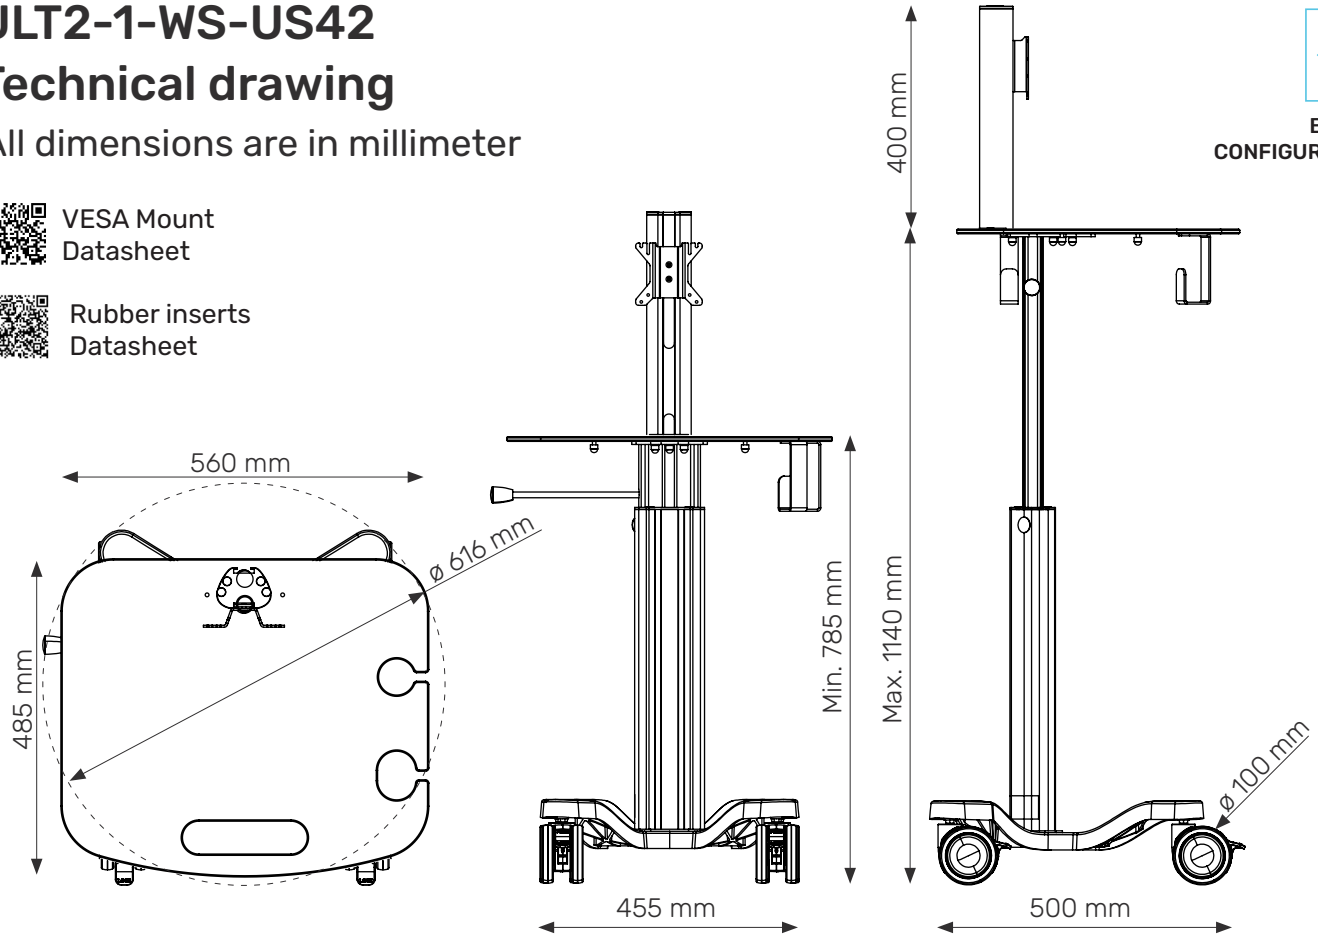

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-1-WS-US44
Technical drawing

All dimensions are in millimeter

VESA Mount Datasheet

Rubber inserts Datasheet

BACK TO CONFIGURATIONS

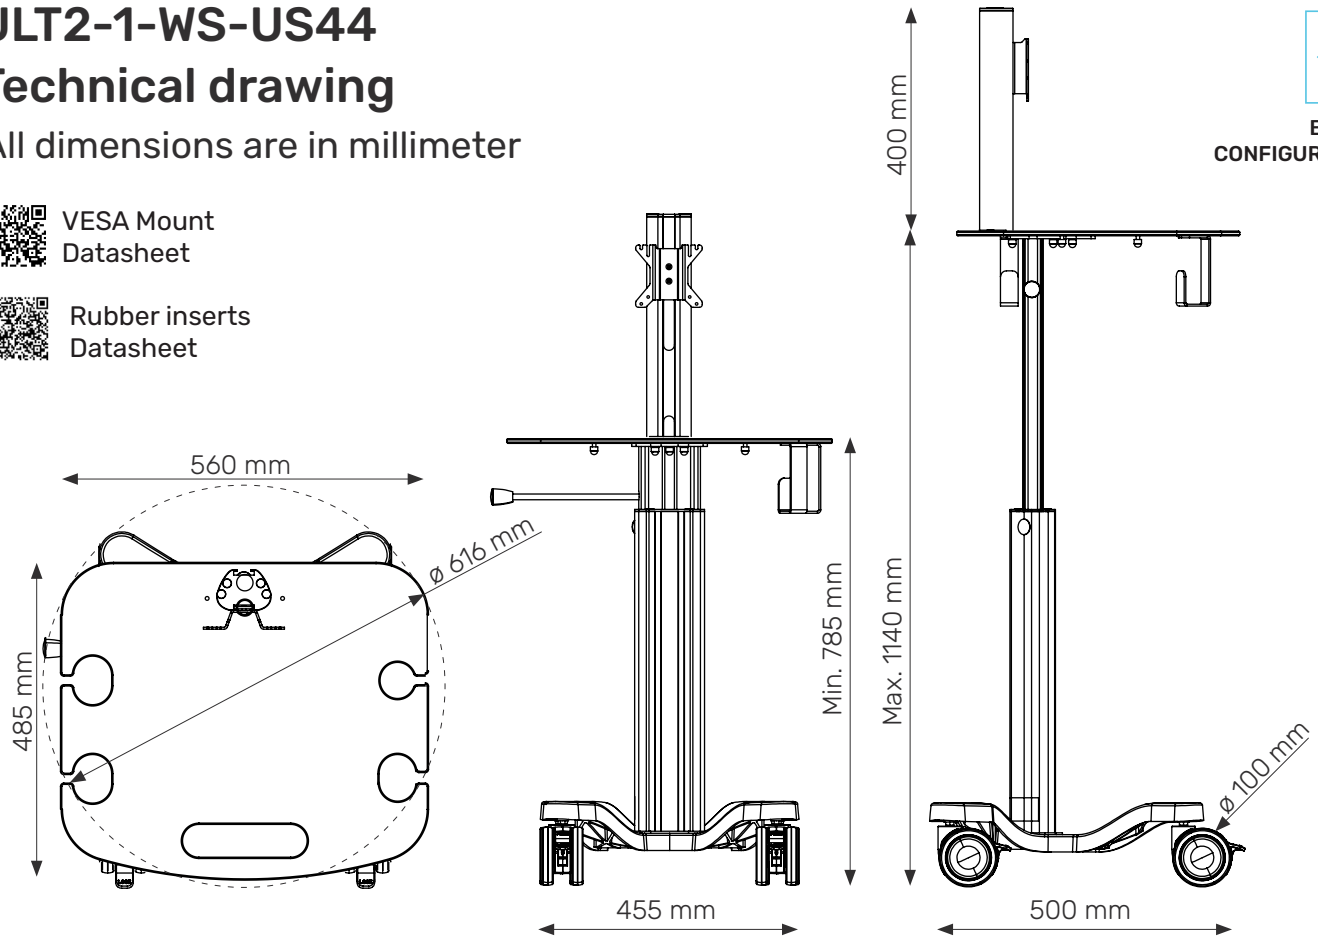

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-2
Technical drawing

All dimensions are in millimeter

Tablet Mount
Datasheet

Rubber inserts
Datasheet

BACK TO
CONFIGURATIONS

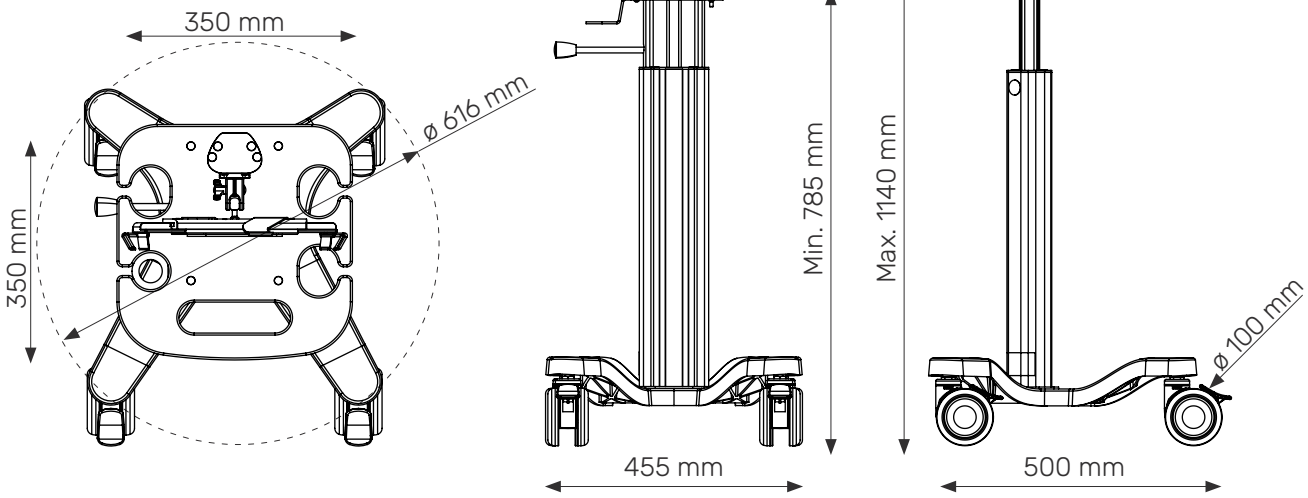

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 350 mm, d: 350 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-2-WS-US42
Technical drawing

All dimensions are in millimeter

Tablet Mount Datasheet

Rubber inserts Datasheet

BACK TO CONFIGURATIONS

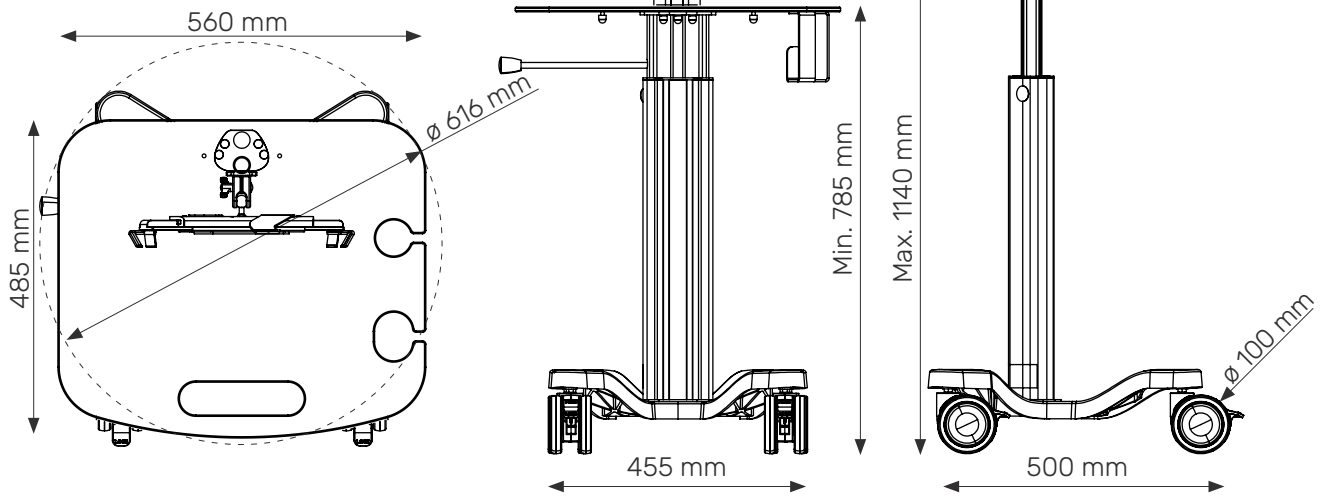

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 / RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-2-WS-US42
Technical drawing

All dimensions are in millimeter

BACK TO CONFIGURATIONS

Tablet Mount Datasheet

Rubber inserts Datasheet

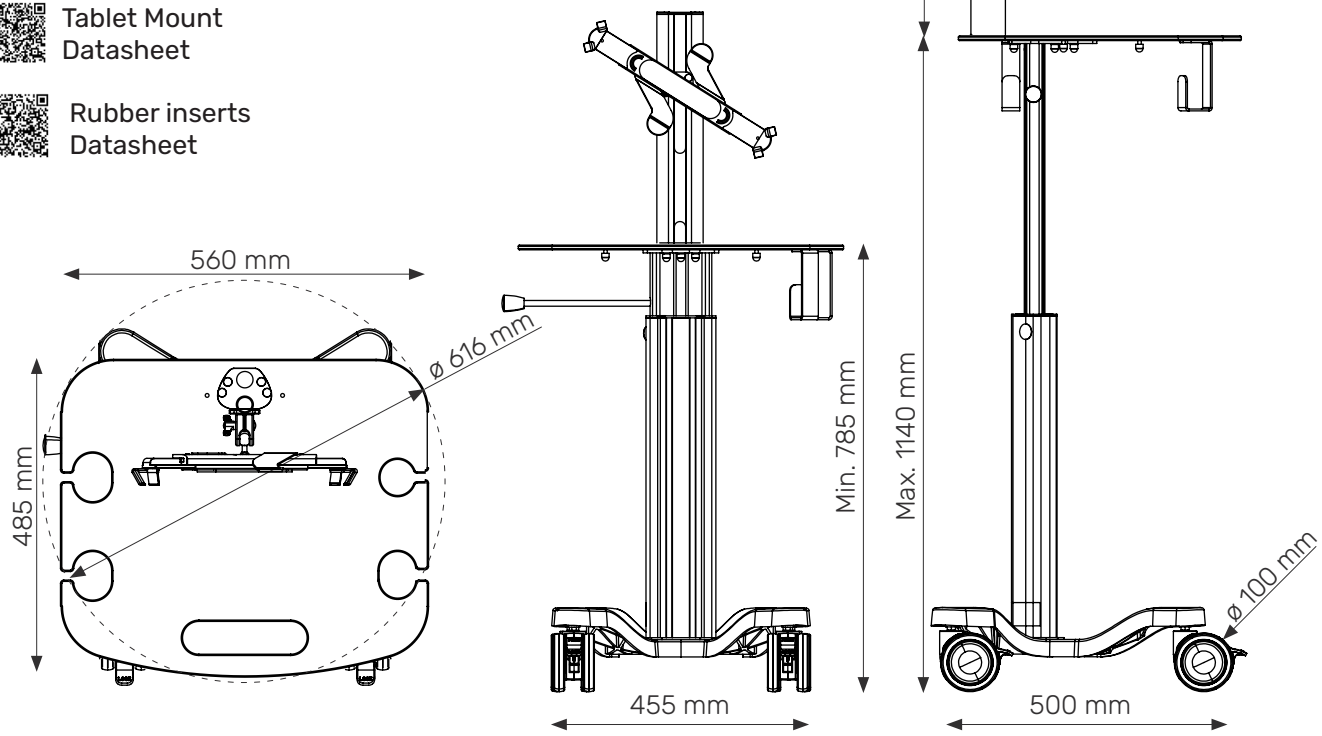

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 / RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-3
Technical drawing

All dimensions are in millimeter

BACK TO CONFIGURATIONS

Laptop Mount Datasheet

Rubber inserts Datasheet

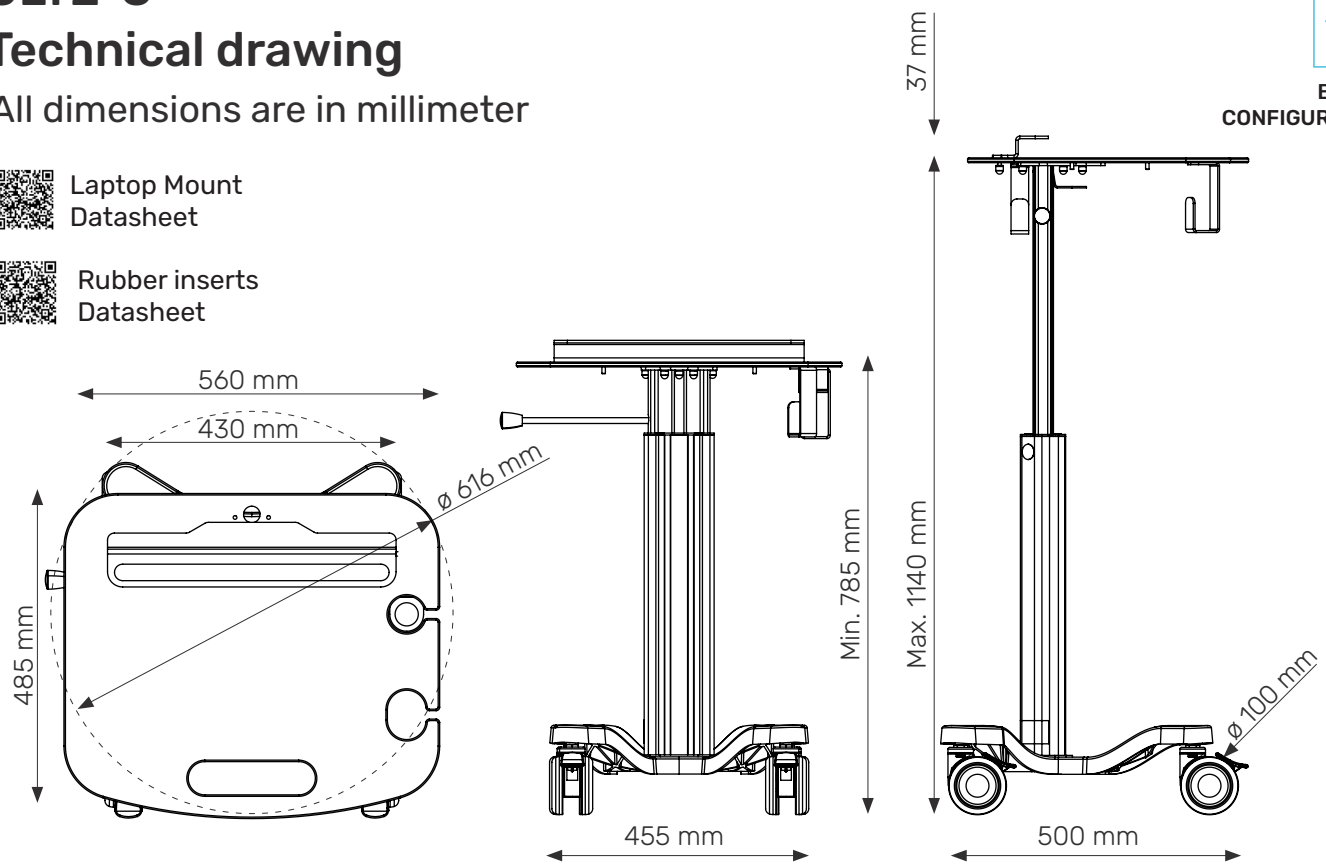

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Loading capacity	25 kg
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 / RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080


ULT2-3-WS-US44
Technical drawing

All dimensions are in millimeter

BACK TO CONFIGURATIONS

Laptop Mount Datasheet

Rubber inserts Datasheet

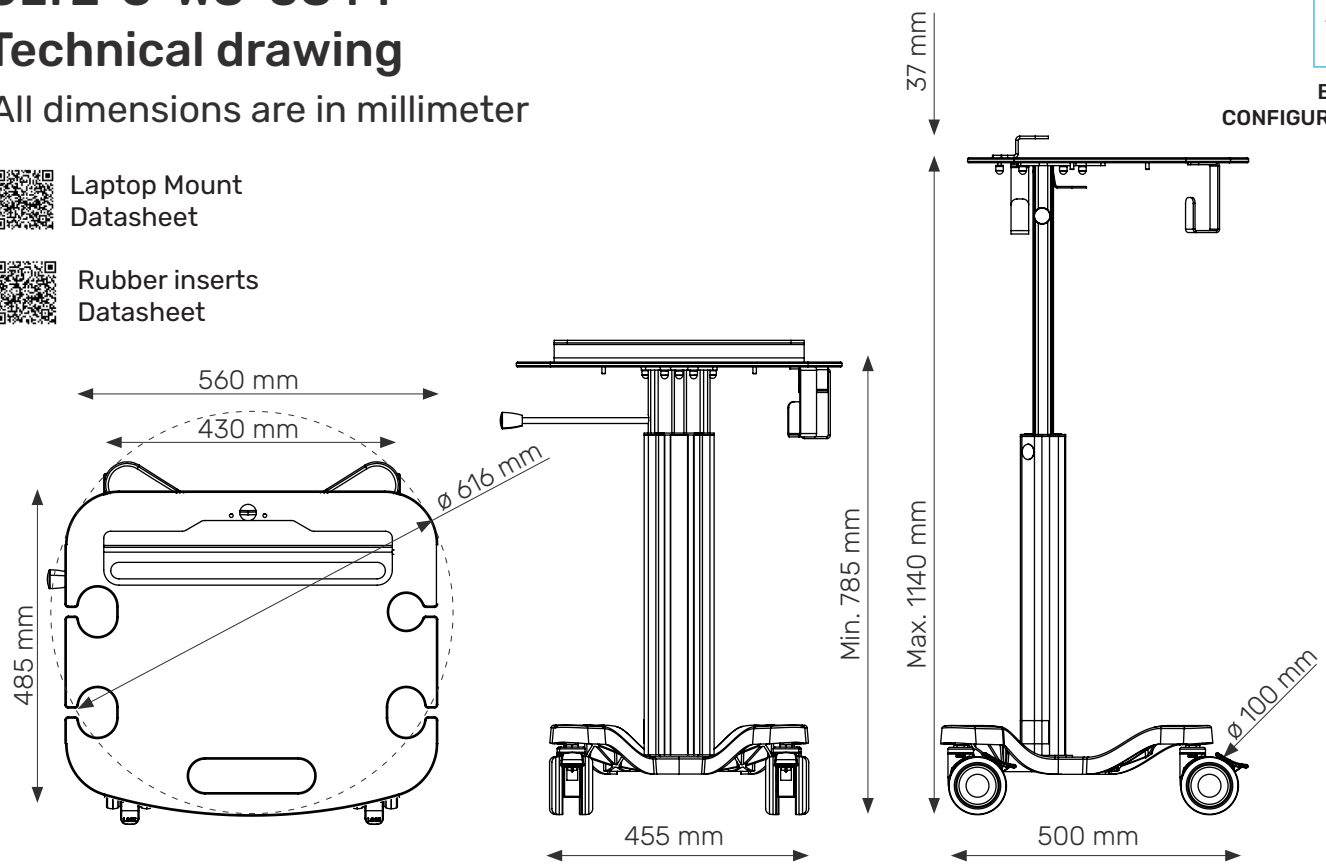

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Loading capacity	25 kg
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 / RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-7
Technical drawing


All dimensions are in millimeter


Tablet Mount Datasheet


Rubber inserts Datasheet

Tablet Arm Datasheet

BACK TO CONFIGURATIONS

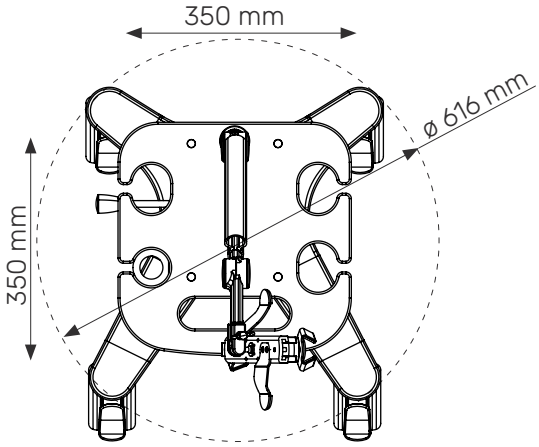

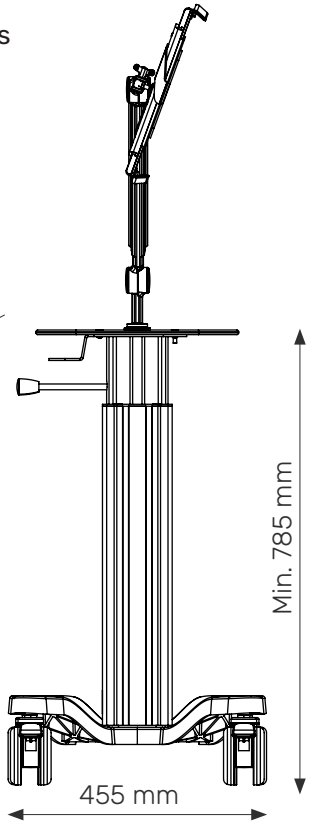

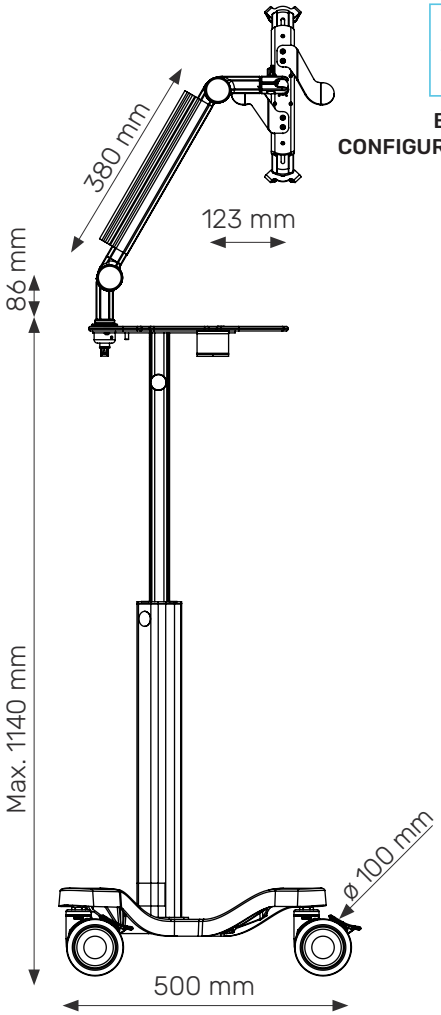

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 350 mm, d: 350 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-7-WS-US42
Technical drawing


All dimensions are in millimeter

Tablet Mount Datasheet

Rubber inserts Datasheet

Tablet Arm Datasheet

BACK TO CONFIGURATIONS

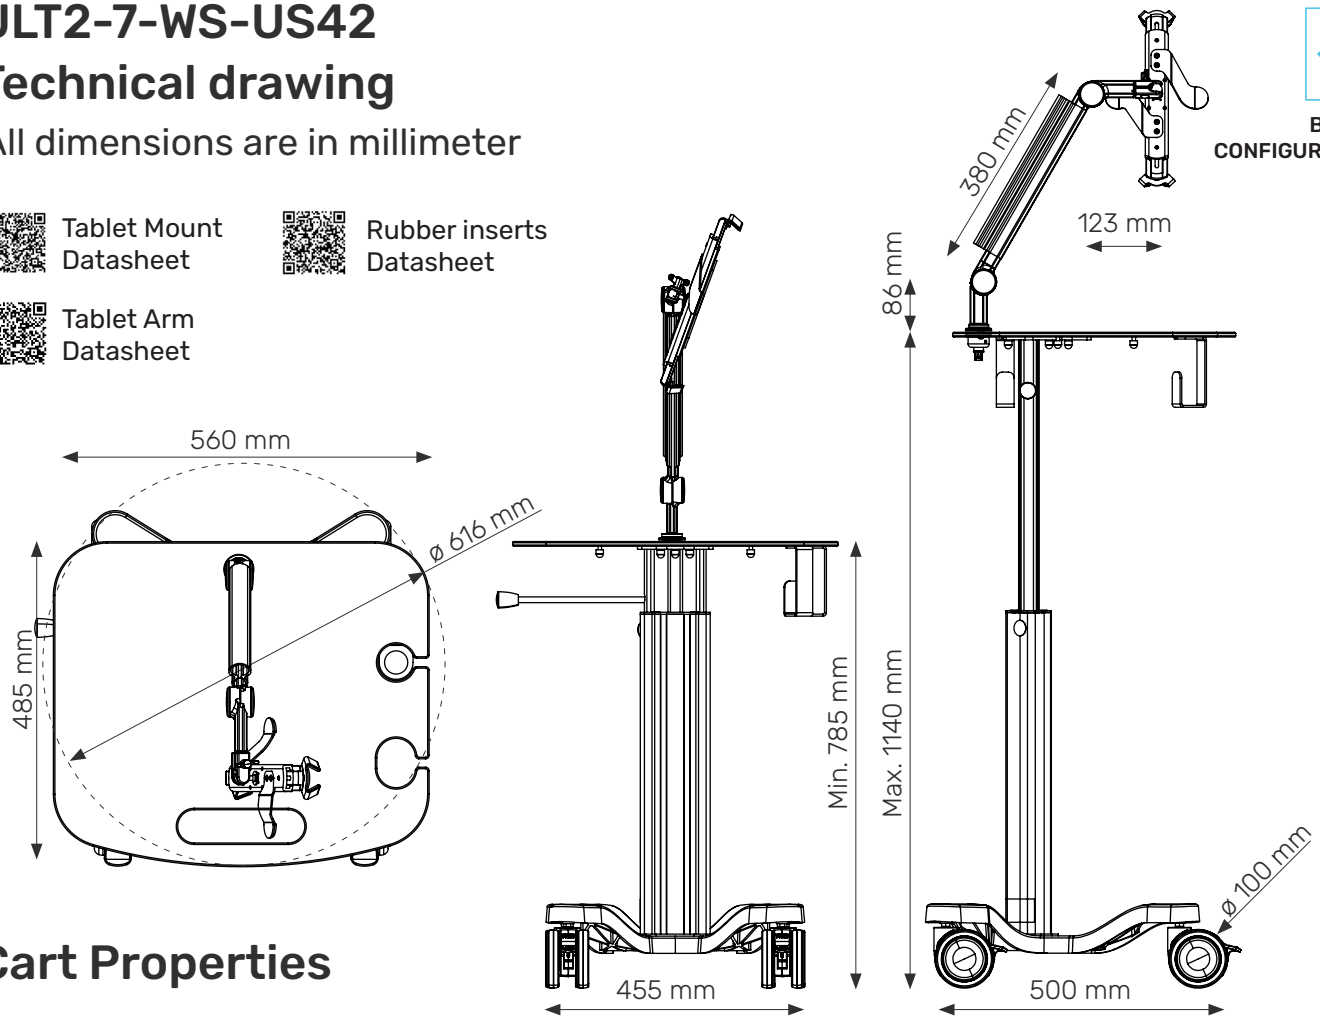

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-7-WS-US44
Technical drawing


All dimensions are in millimeter

Tablet Mount Datasheet

Rubber inserts Datasheet

Tablet Arm Datasheet

BACK TO CONFIGURATIONS

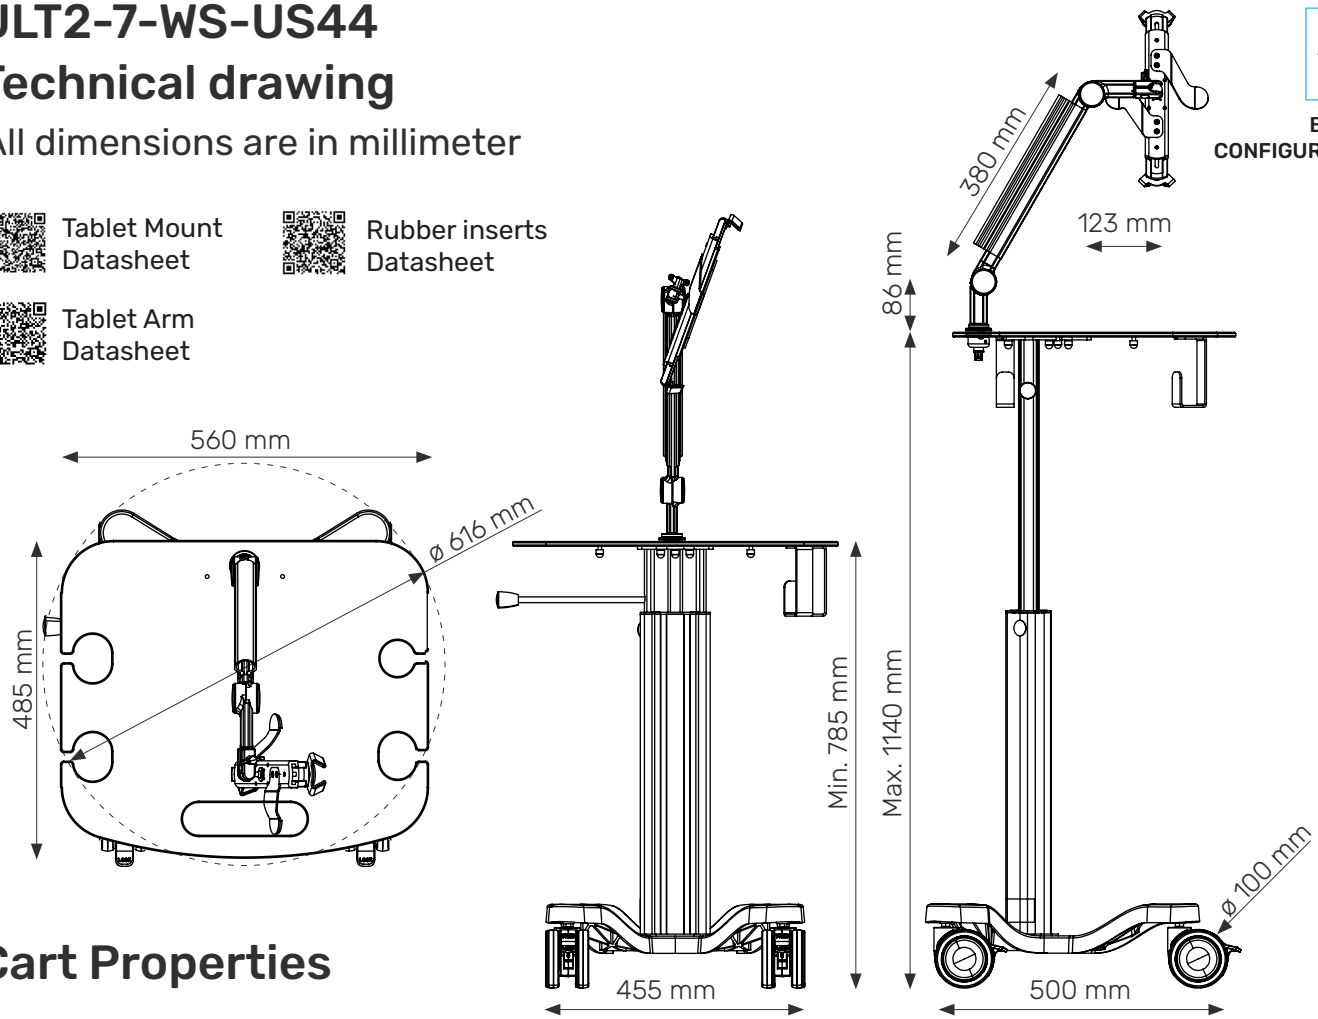

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-8
Technical drawing


All dimensions are in millimeter

VESA Mount Datasheet

Rubber inserts Datasheet

VESA Arm Datasheet

BACK TO CONFIGURATIONS

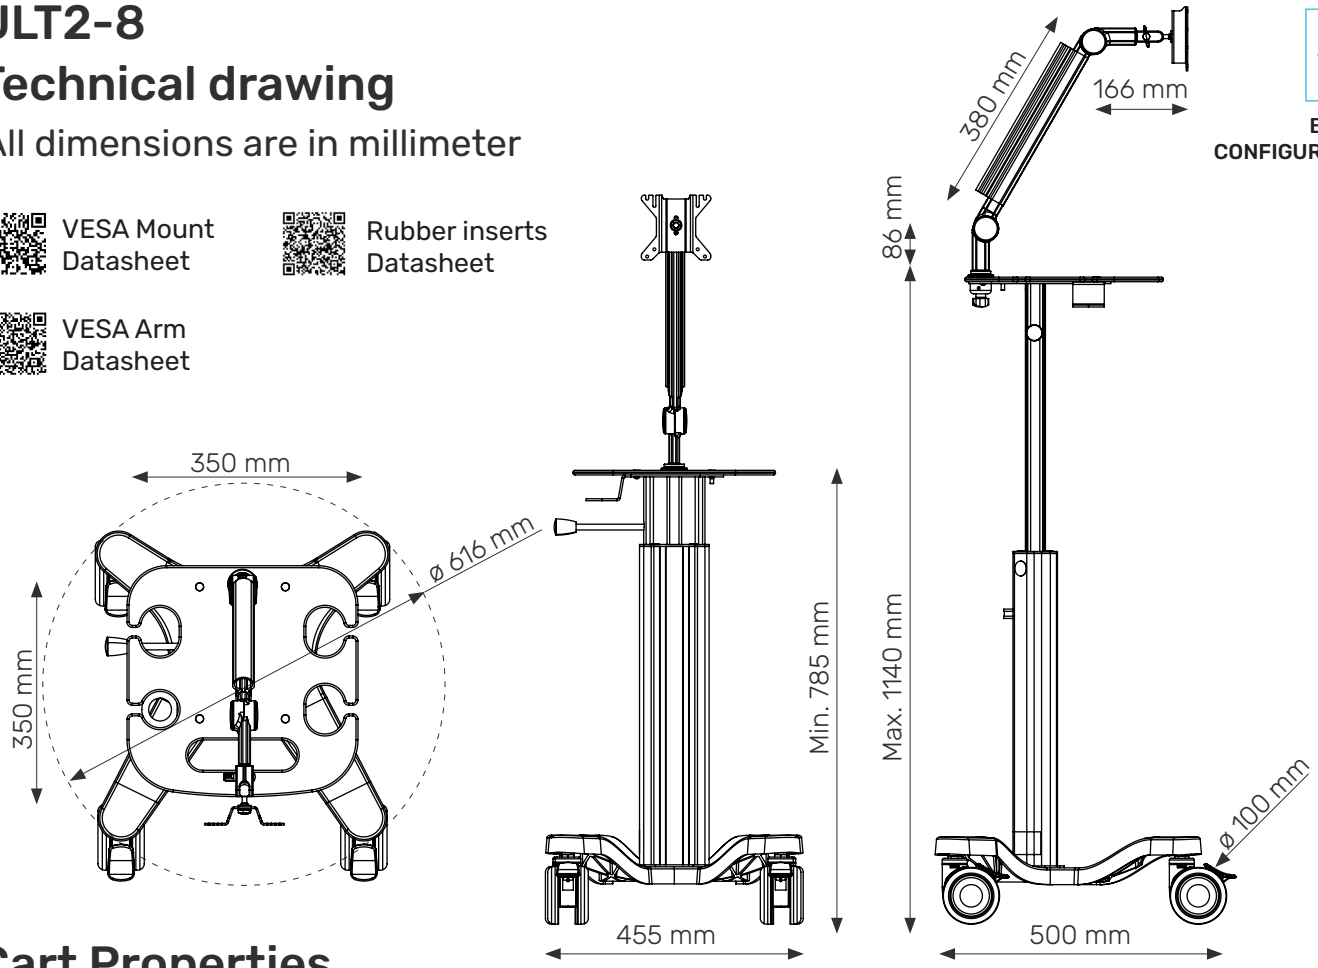

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 350 mm, d: 350 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-8-WS-US42
Technical drawing


All dimensions are in millimeter

VESA Mount Datasheet

Rubber inserts Datasheet

VESA Arm Datasheet

BACK TO CONFIGURATIONS

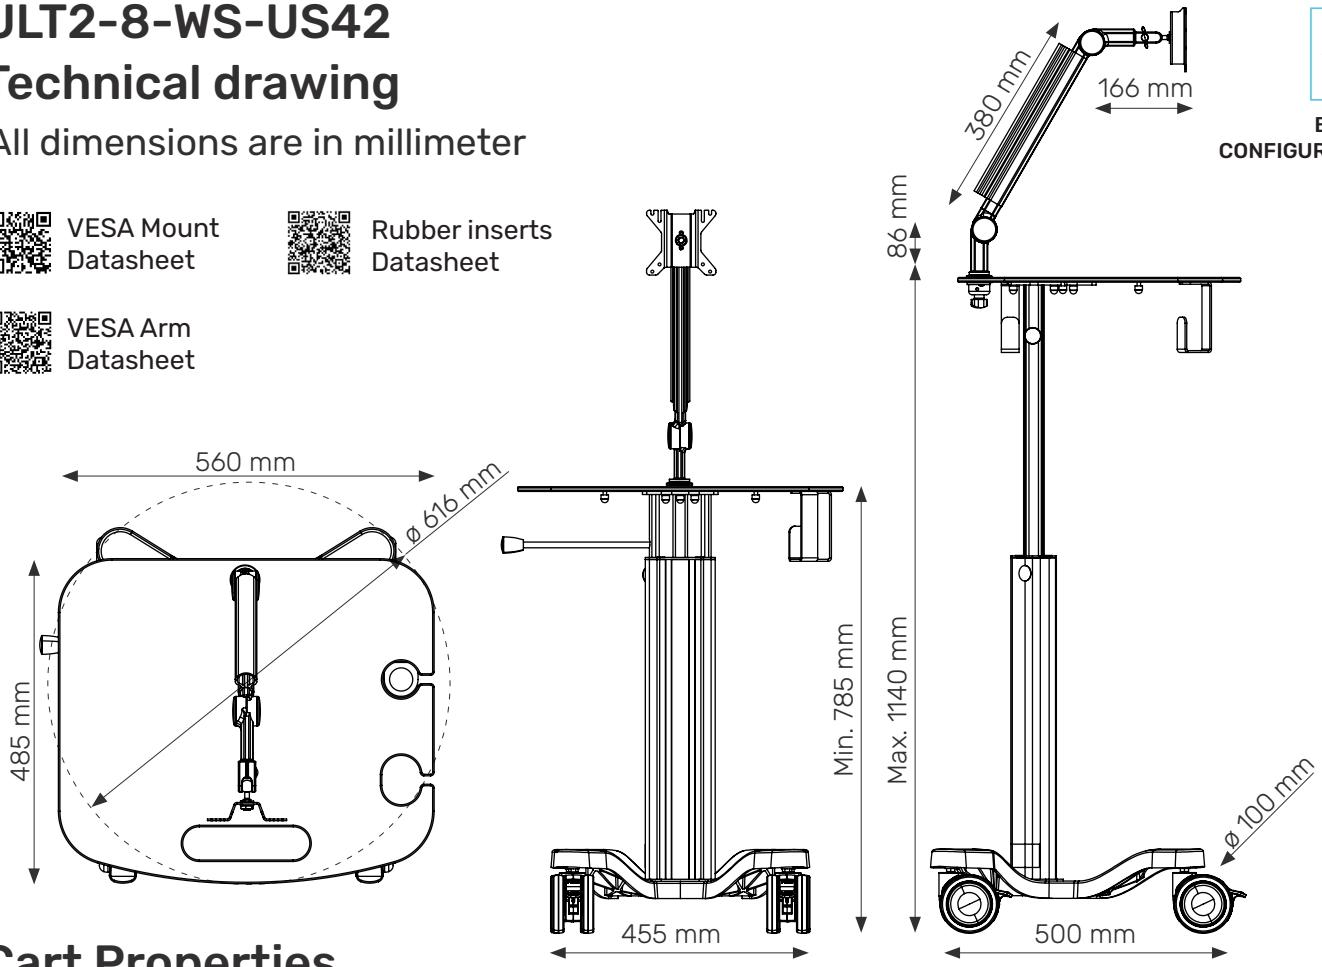

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080

ULT2-8-WS-US44
Technical drawing


All dimensions are in millimeter

VESA Mount Datasheet

Rubber inserts Datasheet

VESA Arm Datasheet

BACK TO CONFIGURATIONS

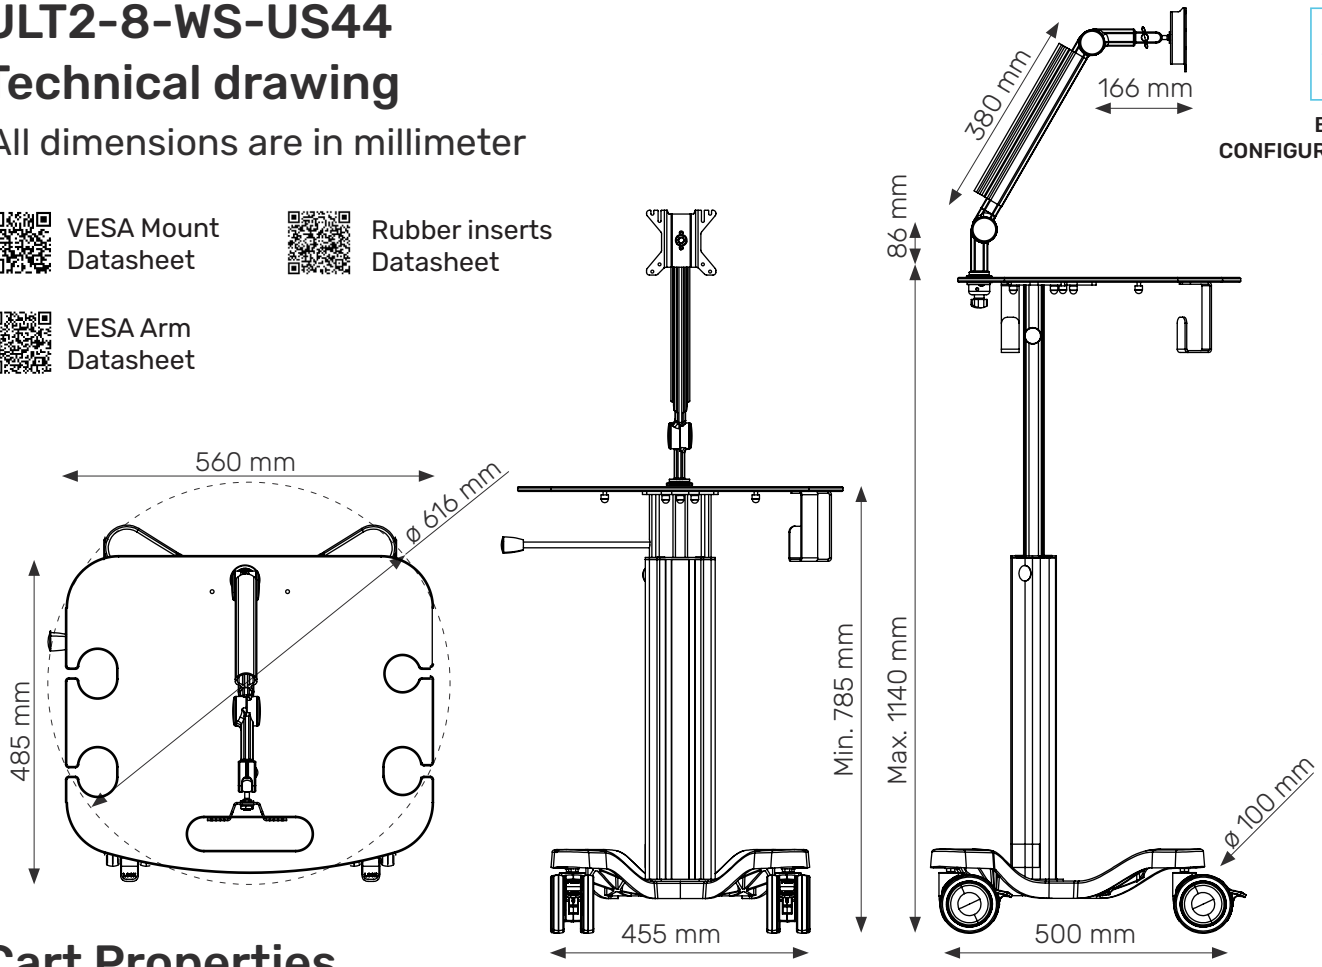

Cart Properties

Mechanical data	
Height	785 mm - 1140 mm (Travel: 355 mm)
Weight	18 kg
Worktop dimensions	w: 560 mm, d: 485 mm
Wheelbase dimension	w: 455 mm, d: 500 mm
Wheel construction	Polyamide with Polyurethane tread
Wheels/locking	4 lockable, 100 mm diameter, ESD
Loading capacity	25 kg
Packaging dimensions	1 box: Box1: 745 x 600 x 300 mm, weight: 14kgs 1 Pallet (10 Carts): 120 x 80 x 160cm, weight: 150kgs
Construction	
Main material	Aluminium
Surface finishing	Powder coating
Color	
Default black and white	Azzurro 3602 RAL 9016
Custom color	
Certificates	
Certificates conforms to	IEC60601-1:2012 (Edition 3)
CE	Rohs compliant
HS Code	94032080